

LiFe 30-12

12V / 30Ah

Lithium - Iron Phosphate



Features

High energy density
Automatic protection with battery management system (internal)
Low self-discharge
Long cycle life
Excellent performance in all operating temperatures
Cost effective
Fast charge
Drop-in replacement
Guaranteed Safety



Nominal characteristics

Nominal Voltage	: 12.8V
Nominal capacity	: 30Ah
Energy	: 384Wh
IR	: $\geq 30\text{m}\Omega$ @100% SOC
Efficiency	: $\geq 99.5\%$
Maximum Modules in Series	: 2 (Single Use)

Mechanical characteristics

Case Material	: ABS
Dimensions (LxWxH)	: 166x175x125 mm
Weight	: 4.7kg $\pm 3\%$
Terminal Type	: F13 (M5)
IP Grade	: -
Cell Type-Chemistry	: Prismatic LiFePO ₄

Charge & discharge characteristics

Voltage Window	: 10.8-14.6V
Max. Continuous Charge	: 30A
Max. Continuous Discharge	: 30A
Peak Discharge Current	: 80A (10s $\pm 1\text{s}$)
Recomm. Charge Current	: 15A
Recomm. Discharge Current	: 15A

Operating Conditions

Cycle Life	: ≥ 2000
Operating Temperature	: Charge 10°C ~ 45°C Discharge -20°C ~ 55°C
Storage Temperature	: 20°C ~ 30°C
Storage Duration	: 12 months at 25°C

BMS characteristics

Primary Charging Protection	: Current	40~60A
	: Delaytime	15 $\pm 2\text{s}$
Secondary Charging Protection	: Current	$\geq 60\text{A}$
	: Delaytime	3 $\pm 1\text{s}$
Primary Discharging Protection	: Current	45~80A
	: Delaytime	15 $\pm \text{s}$
Secondary Discharging Protection	: Current	80~133A
	: Delaytime	3 $\pm 1\text{s}$
Over-charge Voltage Protection	: Voltage	$\geq 14.8\text{V}$
	: Delaytime	1~2s
Over-discharge Voltage Protection	: Voltage	$\geq 9.2\text{V}$
	: Delaytime	1~2s
Temperature Protection	: PCB Temp.	$\geq 90^\circ\text{C}$
	: Recover	$\leq 65^\circ\text{C}$

Constant Current Discharge Data (Amp @25°C)

	1h	2h	3h	5h	10h
Cut-off voltage (10.8V)	30A	15A	10A	6A	3A

Constant Power Discharge Data (Watt @25°C)

	1h	2h	3h	5h	10h
Cut-off voltage (10.8V)	368W	186W	125W	76W	38.4W


LiFe 30-12

12V / 30Ah


Lithium - Iron Phosphate




Number of Cycles Vs. DOD

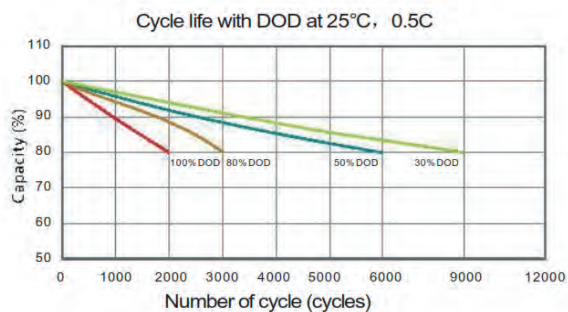

Discharge Performance at R.T.

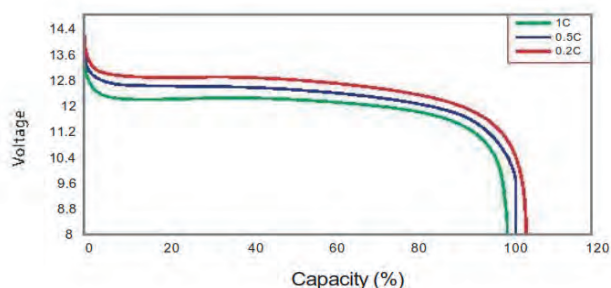


Cycle Life in Relation to Temperature

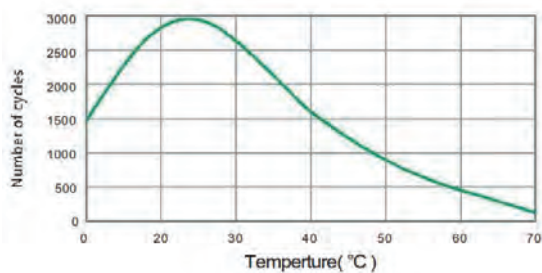


Battery Capacity (C) Vs. Open Circuit Voltage (OCV)

SOC Vs OCV

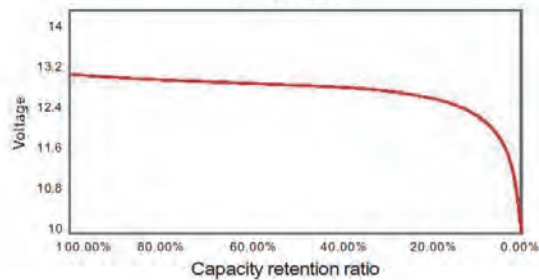

Battery Capacity Vs. Charging Time

Charging capacity(%) VS time with different rate at 25°C

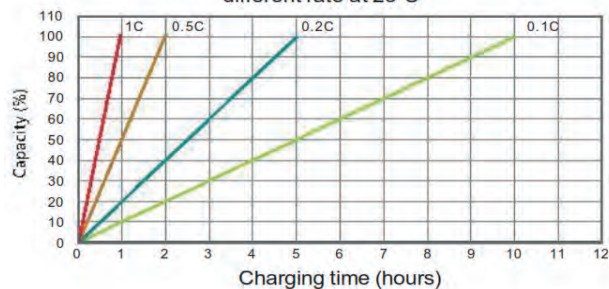

Temperature Effects on Capacity

